

SZSW2730

Solar Warning Light

www.szseva.com

It is suitable for high-voltage lines, tower cranes, road administration, ships, planting, tower cranes, navigation channels and other places as a warning.



Magnetic suction Type



Seat Type



Sleeve Type



Intubation Type



Sidewall Type



Online single head


TECHNICAL PARAMETERS

Light source:LED(Red)
Battery capacity: 800mAh
Working time: 25 days
Visual distance:800-1000m(Sunny day)
Protection grade: IP65
Working temperature : -30~50°C
Solar power: 0.4W
Flicker frequency:50 times / min
Weight 0.2Kg/0.4Kg/0.65Kg/ 0.9Kg



Online double head

Fixed light

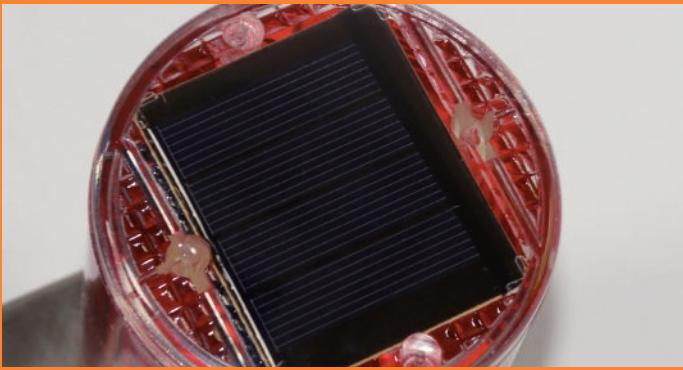

Solar panels

Solar panel charging, no manual switch operation, time-saving, easy to use, energy-saving and environmental protection.



Eagle eye lens

The lamp cover is made of transparent polycarbonate material with high structural strength, good transmittance and aging resistance.




IP65




Unique design

Other performance features:


- Energy saving, environmental protection, visual distance.
- Light control without switch, does not flash in the daytime, flickers automatically in dark environment, no manual operation is required, saving time and trouble.
- With a variety of installation methods, a wide range of applications.

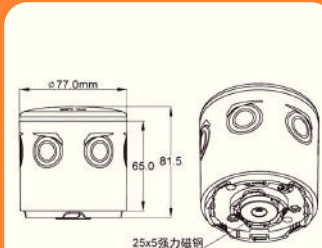


Magnetic suction Type

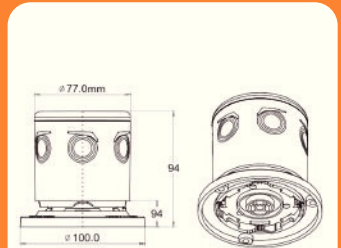


Seat Type

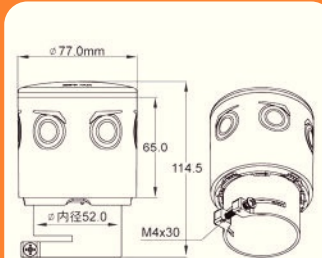


Sleeve Type

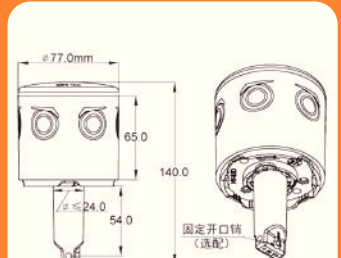


Intubation Type

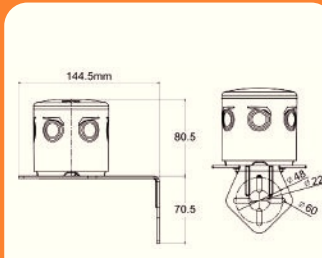

Sidewall Type

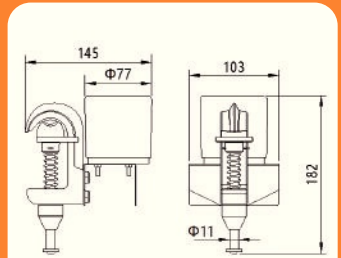

Online single head

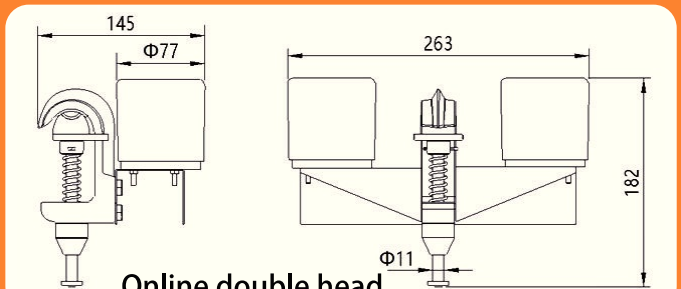

Online double head

Contact: Alice Zhong alice.hzxn@szseva.com