






■ Features

- It is suitable for working lighting in workshops, workshops, aisles, warehouses, field equipment areas, and operating areas.

■ Technical Parameters


No	Table Of Basic Product Parameters			
1	Rated Voltage(AC)	AC90~240V		
2	Frequency	50/60Hz		
3	Product Number	SZSW7162-12	SZSW7162-18	SZSW7162-24
4	Power Rating	12W	18W	24W
5	Luminous Flux	1200lm	1800lm	2400lm
6	Color Temperature	5700K±300K		
7	PF	PF≥0.95		
8	Ra	Ra≥80		
9	Beam Angle	110°		
10	Lighting Effect	100 lm/W		
11	IP/IK Level	IP67 (IP68 can be customized)/IK08		
12	Ambient Temperature	-20℃~45℃		
13	Enclosure Material	Die-casting Aluminum		
14	Warranty	5 years		
15	LED Source	Osram/Philips		
16	Driver	SEVA/Meanwell/Moso/SoSen		
17	Dimension (mm)	Φ180×100mm		
18	Weight	1.4kg		

Dimension(Unit:mm)

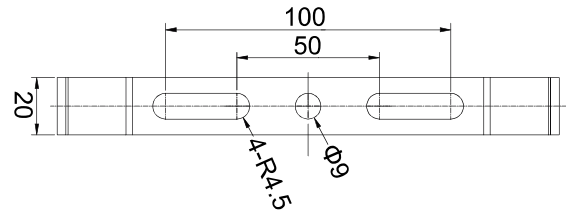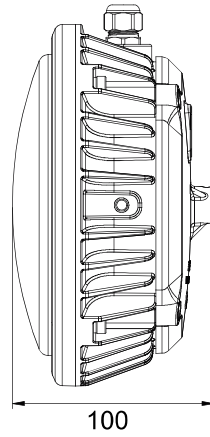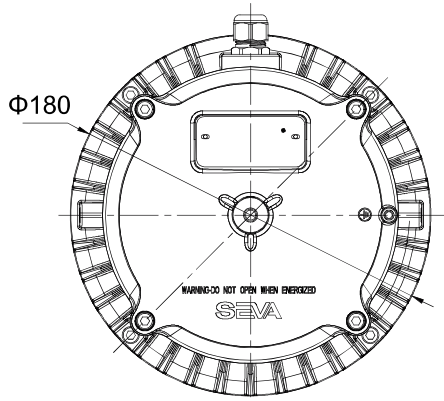


Bracket


Installation (Unit:mm)

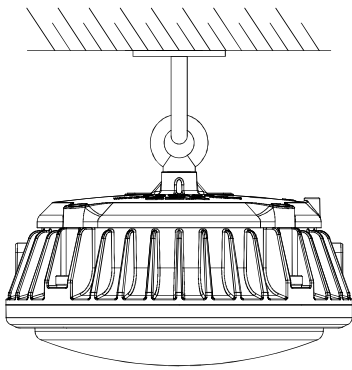

Ring Type

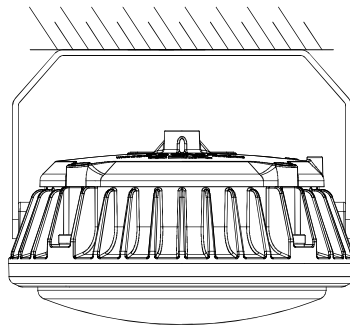


Ceiling Type

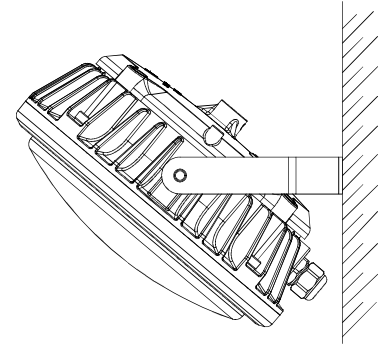

Side Wall Type

Photometric Data

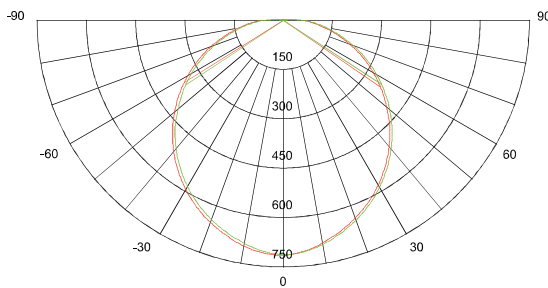

12W Illumination-110 Degree		
1m	4m	39Lux
2m	4m	26Lux
3m	6m	18Lux
4m	6.5m	10Lux
Height	Diameter	Eavg

18W Illumination-110 Degree		
1m	4m	48Lux
2m	4m	35Lux
3m	6m	24Lux
4m	6.5m	16Lux
Height	Diameter	Eavg

24W Illumination-110 Degree		
1m	3m	62Lux
2m	4m	48Lux
3m	6m	35Lux
4m	6.5m	20Lux
5m	5m	16Lux
Height	Diameter	Eavg