



■ Features


- ⊙ Suitable for all kinds of emergency rescue, fixed-point search, emergency treatment, rescue, repair and other long-distance or large area lighting.

■ Technical Parameters



No		Table Of Basic Product Parameters	
1	Ex-mark	Ex nCnR IIC T6 Gc/Ex tD A21 IP65 T80 °C	
2	Rated Voltage	12V	
3	Rated Capacity	12000mAh	
4	Product Number	SW2600/2601	
5	Luminous Flux(lm)	3600	
6	Duration	Working Light	Strong Light
		16W	30W
		≥20H	≥10H
7	Luminous Flux	3000lm	
8	Color Temperature	5700~6500K	
9	Ra	>80	
10	Beam Angle	60°	
11	Charging Time	8~10H	
12	IP/IK Level	IP65/IK08	
13	Ambient Temperature	-20 °C ~45 °C	
14	Enclosure Material	Die-casting Aluminum	
15	Cycle Life (Cycles)	~1000	
16	LED Source	Cree	
17	Driver	SEVA	
18	Dimension (mm)	L262*W212*H850mm	
19	Weight	6kg	
20	Power Adapter	Input :AC180-240V 50Hz/1.0Amax	Output:30V ----- 2.0A

■ Dimensions (Unit:mm)

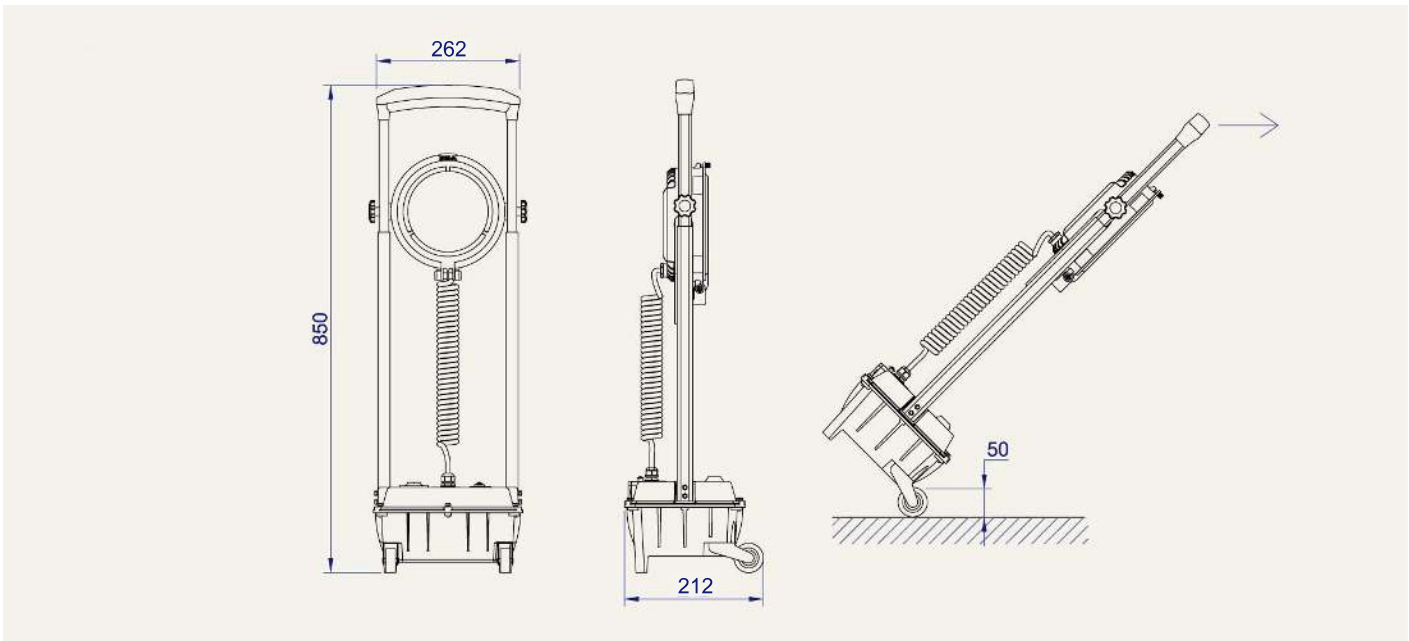

■ Characteristics(mm)

■ Dual Dode Switching Design
A set of lamps with 2 lighting modes, open the face cover become projector lighting, Close the top cover and it will become floodlight.

■ Digital Power Display
Digital power display, record accurate surplus power at any time, remain the use time.

■ Height Adjustment
Press the middle button to adjust the low, Middle and high heights.

■ Key Function