



Floodlight



Spotlight




Omnidirectional Light

### Technical Parameters




No		Table Of Basic Product Parameters					
1	IECEX Standard	Exd mb IIC T6 Gb / Ex tD mbD A21 IP66 T80 C					
2	Rated Voltage(AC)	AC 100V~277V					
3	Frequency	50/60Hz					
4	Product Number	SZSW8160-F		SZSW8160-P		SZSW8160-O	
5	Power Rating	50W	60W	50W	60W	50W	60W
6	Luminous Flux	5000lm	6000lm	5800lm	7000lm	4250lm	5100lm
7	Color Temperature	2700-6500K					
8	PF	>0.9					
9	Ra	>70					
10	Beam Angle	15°/120°/160°					
11	Lighting Effect	100-130 lm/W					
12	IP/IK Level	IP66/IK08					
13	Ambient Temperature	-20 C ~45 C					
14	Enclosure Material	Die-casting Aluminum					
15	Warranty	5 years					
16	LED Source	Osram/Philips					
17	Driver	SEVA/Meanwell/Moso/SoSen					
18	Dimension (mm)	ø248×88.5mm(P)		ø248×88.5mm(S)		ø248×115.5mm(O)	
19	Weight	4.5kg(P)		4.64kg(S)		3.5kg(O)	

### Dimension(Unit:mm)

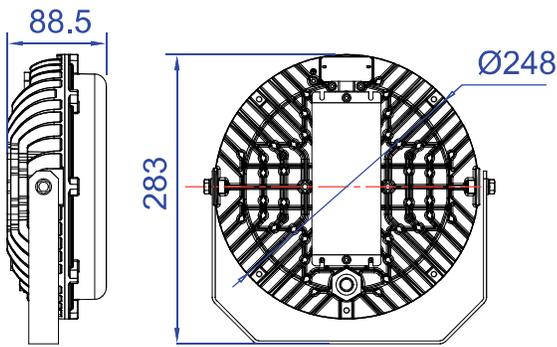


Floodlight/Spotlight

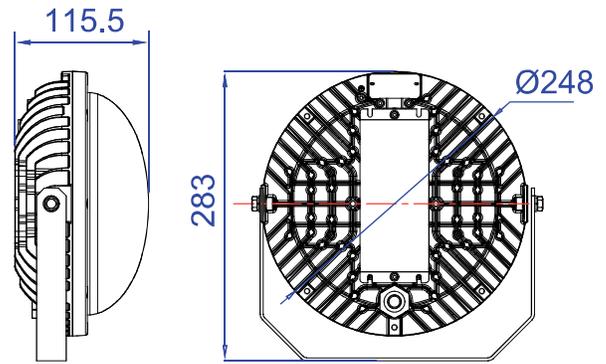


Omnidirectional Light


### Installation (Unit:mm)

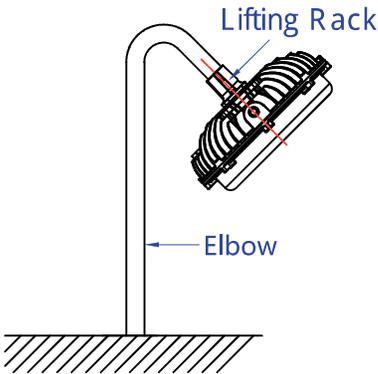


Elbow Installation

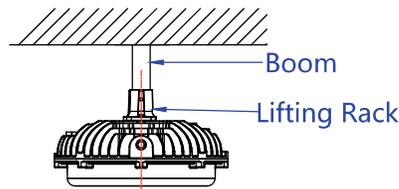

Pipe Installation

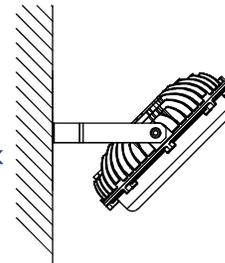

Ceiling Installation

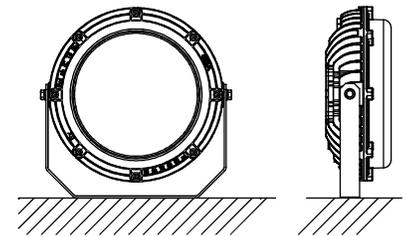


Sitting Installation


#### Remark :

- 1.The luminaires are factory- installed as standard by default.
- 2.Optional installation methods: elbow type, boom type.


### Photometric Data

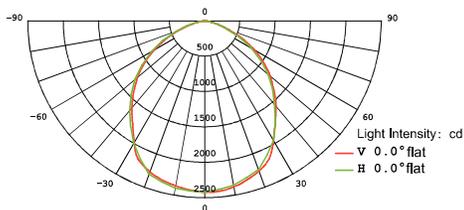

Floodlight

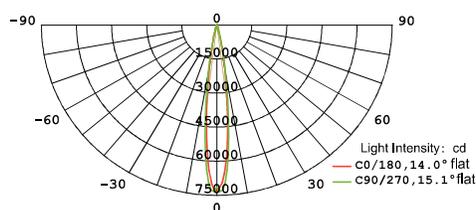

Spotlingt

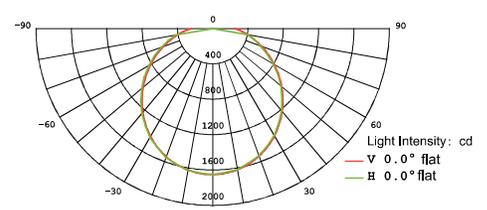

Omnidirectional Light